



1. Description

1.1. Project

Project Name	F439_CPP_DNS_Example_01
Board Name	NUCLEO-F439ZI
Generated with:	STM32CubeMX 6.11.1
Date	03/08/2025


1.2. MCU

MCU Series	STM32F4
MCU Line	STM32F429/439
MCU name	STM32F439ZITx
MCU Package	LQFP144
MCU Pin number	144

1.3. Core(s) information

Core(s)	Arm Cortex-M4
---------	---------------

2. Pinout Configuration

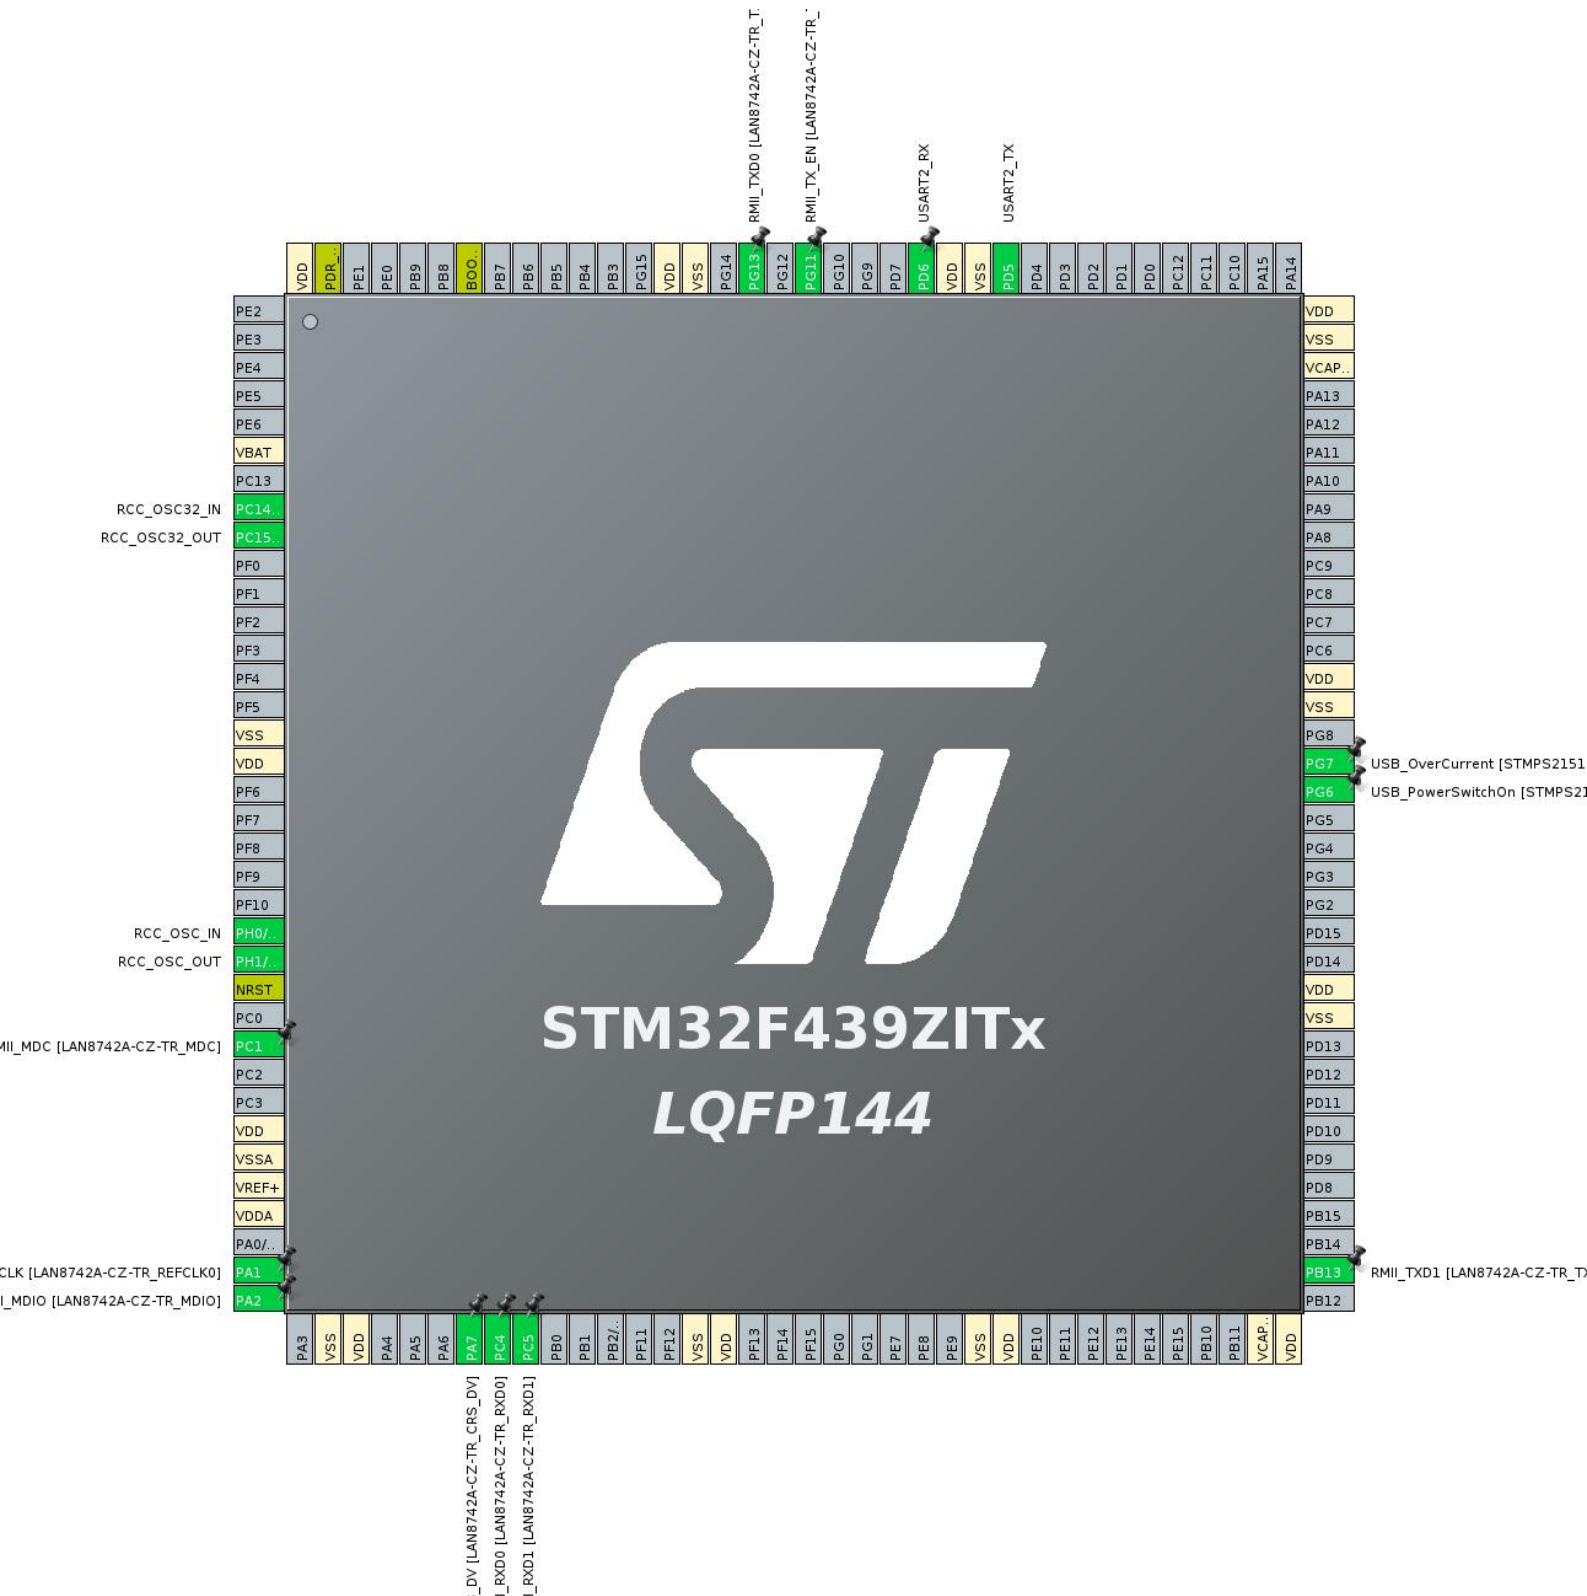


3. Pins Configuration

Pin Number LQFP144	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
6	VBAT	Power		
8	PC14/OSC32_IN	I/O	RCC_OSC32_IN	
9	PC15/OSC32_OUT	I/O	RCC_OSC32_OUT	
16	VSS	Power		
17	VDD	Power		
23	PH0/OSC_IN	I/O	RCC_OSC_IN	
24	PH1/OSC_OUT	I/O	RCC_OSC_OUT	
25	NRST	Reset		
27	PC1	I/O	ETH_MDC	RMII_MDC [LAN8742A-CZ- TR_MDC]
30	VDD	Power		
31	VSSA	Power		
32	VREF+	Power		
33	VDDA	Power		
35	PA1	I/O	ETH_REF_CLK	RMII_REF_CLK [LAN8742A-CZ- TR_REFCLK0]
36	PA2	I/O	ETH_MDIO	RMII_MDIO [LAN8742A-CZ- TR_MDIO]
38	VSS	Power		
39	VDD	Power		
43	PA7	I/O	ETH_CRS_DV	RMII_CRS_DV [LAN8742A- CZ-TR_CRS_DV]
44	PC4	I/O	ETH_RXD0	RMII_RXD0 [LAN8742A-CZ- TR_RXD0]
45	PC5	I/O	ETH_RXD1	RMII_RXD1 [LAN8742A-CZ- TR_RXD1]
51	VSS	Power		
52	VDD	Power		
61	VSS	Power		
62	VDD	Power		
71	VCAP_1	Power		
72	VDD	Power		
74	PB13	I/O	ETH_TXD1	RMII_TXD1 [LAN8742A-CZ- TR_TXD1]
83	VSS	Power		
84	VDD	Power		

Pin Number LQFP144	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
91	PG6 *	I/O	GPIO_Output	USB_PowerSwitchOn [STMPS2151STR_EN]
92	PG7 *	I/O	GPIO_Input	USB_OverCurrent [STMPS2151STR_FAULT]
94	VSS	Power		
95	VDD	Power		
106	VCAP_2	Power		
107	VSS	Power		
108	VDD	Power		
119	PD5	I/O	USART2_TX	
120	VSS	Power		
121	VDD	Power		
122	PD6	I/O	USART2_RX	
126	PG11	I/O	ETH_TX_EN	RMII_TX_EN [LAN8742A- CZ-TR_TXEN]
128	PG13	I/O	ETH_TXD0	RMII_TXD0 [LAN8742A-CZ- TR_TXD0]
130	VSS	Power		
131	VDD	Power		
138	BOOT0	Boot		
143	PDR_ON	Reset		
144	VDD	Power		

* The pin is affected with an I/O function

4. Clock Tree Configuration

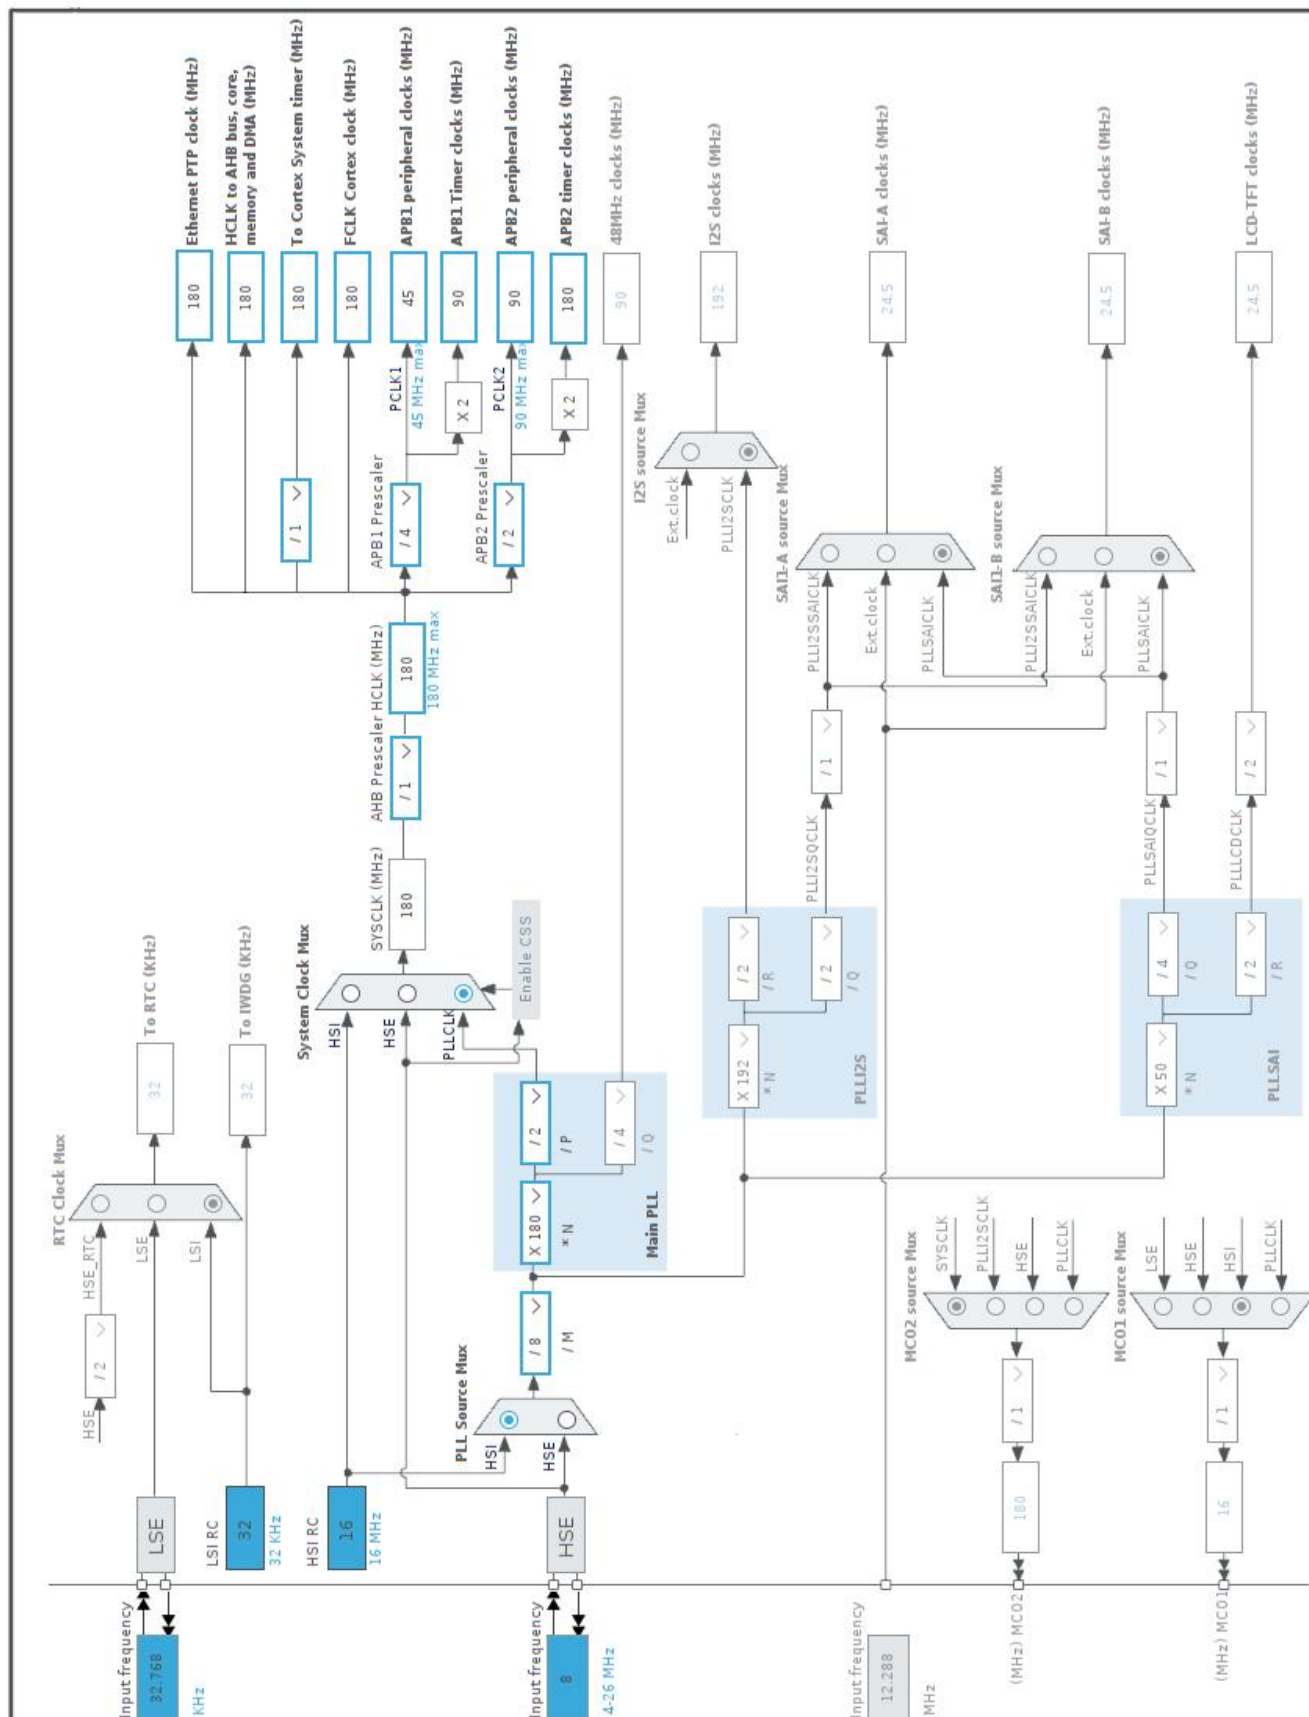

5. Software Project

5.1. Project Settings

Name	Value
Project Name	F439_CPP_DNS_Example_01
Project Folder	/home/johng/STM32CubeIDE/workspace_1.15.5/F439_CPP_DNS_Example_01
Toolchain / IDE	STM32CubeIDE
Firmware Package Name and Version	STM32Cube FW_F4 V1.28.1
Application Structure	Advanced
Generate Under Root	Yes
Do not generate the main()	No
Minimum Heap Size	0x200
Minimum Stack Size	0x400

5.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Keep User Code when re-generating	Yes
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No
Enable Full Assert	Yes

5.3. Advanced Settings - Generated Function Calls

Rank	Function Name	Peripheral Instance Name
1	SystemClock_Config	RCC
2	MX_GPIO_Init	GPIO
3	MX_USART2_UART_Init	USART2
4	MX_LWIP_Init	LWIP

1. Power Consumption Calculator report

1.1. Microcontroller Selection

Series	STM32F4
Line	STM32F429/439
MCU	STM32F439ZITx
Datasheet	DS9484 Rev10

1.2. Parameter Selection

Temperature	25
Vdd	3.3

1.3. Battery Selection

Battery	Li-SOCL2(A3400)
Capacity	3400.0 mAh
Self Discharge	0.08 %/month
Nominal Voltage	3.6 V
Max Cont Current	100.0 mA
Max Pulse Current	200.0 mA
Cells in series	1
Cells in parallel	1


1.4. Sequence

Step	Step1	Step2
Mode	RUN	STOP_UDM (Under Drive)
Vdd	3.3	3.3
Voltage Source	Battery	Battery
Range	Scale1-High	No Scale
Fetch Type	FLASH	n/a
CPU Frequency	180 MHz	0 Hz
Clock Configuration	HSE PLL	Regulator_LP Flash-PwrDwn
Clock Source Frequency	4 MHz	0 Hz
Peripherals		
Additional Cons.	0 mA	0 mA
Average Current	57 mA	100 μ A
Duration	0.1 ms	0.9 ms
DMIPS	225.0	0.0
Ta Max	97.48	104.99
Category	In DS Table	In DS Table

1.5. Results

Sequence Time	1 ms	Average Current	5.79 mA
Battery Life	24 days, 10 hours	Average DMIPS	225.0 DMIPS

1.6. Chart

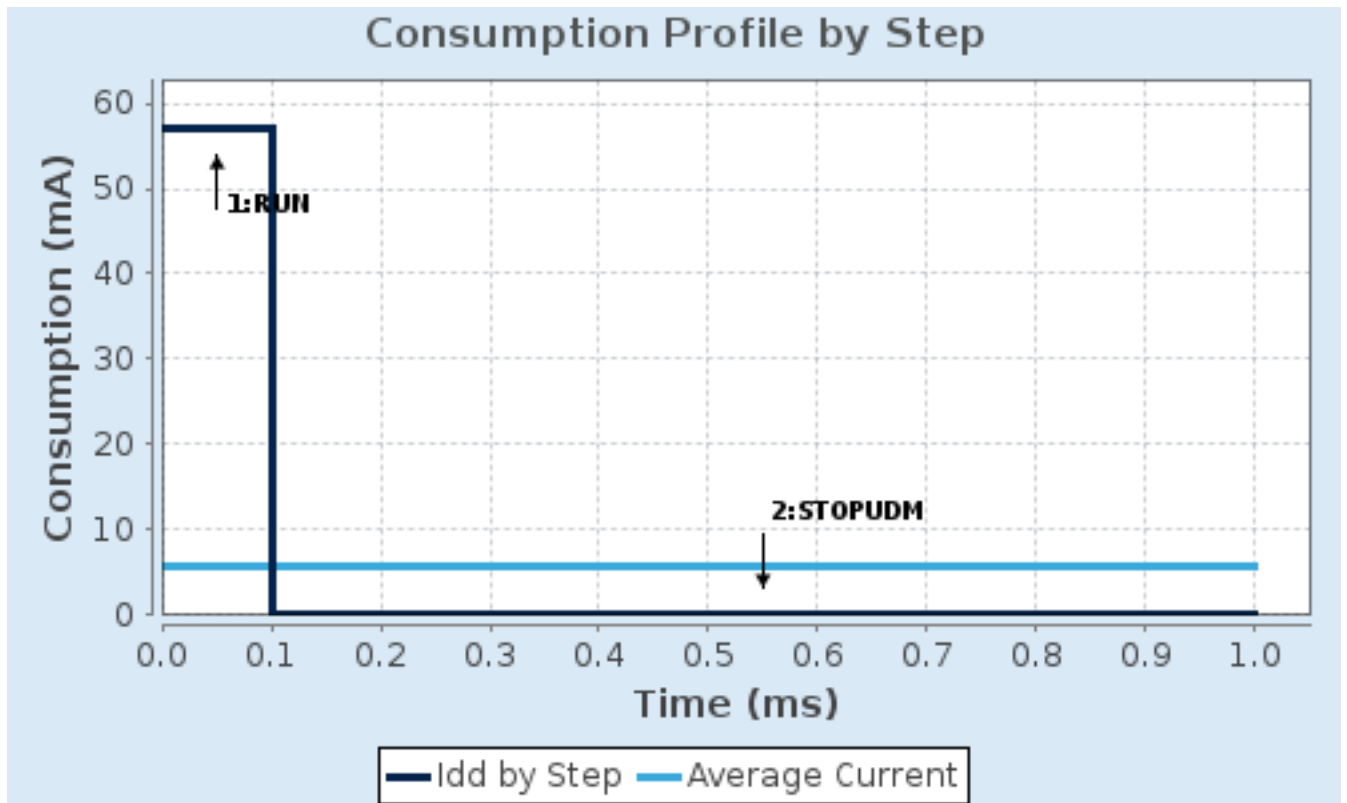

2. Peripherals and Middlewares Configuration

2.1. ETH

Mode: RMII

2.1.1. Parameter Settings:

General : Ethernet Configuration:

Note	PHY Driver must be configured from the LwIP 'Platform Settings' top right tab
Ethernet MAC Address	00:80:E1:00:00:20 *
Rx Buffers Length	1536

Ethernet Basic Configuration:

Rx Mode	Interrupt Mode
---------	----------------

2.2. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

Low Speed Clock (LSE) : Crystal/Ceramic Resonator

2.2.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Instruction Cache	Enabled
Prefetch Buffer	Enabled
Data Cache	Enabled
Flash Latency(WS)	5 WS (6 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
TIM Prescaler Selection	Disabled
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

Power Parameters:

Power Regulator Voltage Scale	Power Regulator Voltage Scale 1
Power Over Drive	Enabled

2.3. SYS

Timebase Source: TIM6

2.4. USART2

Mode: Asynchronous

2.4.1. Parameter Settings:

Basic Parameters:

Baud Rate	19200 *
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

2.5. FREERTOS

Interface: CMSIS_V2

2.5.1. Config parameters:

API:

FreeRTOS API	CMSIS v2
--------------	----------

Versions:

FreeRTOS version	10.3.1
CMSIS-RTOS version	2.00

MPU/FPU:

ENABLE_MPU	Disabled
ENABLE_FPU	Disabled

Kernel settings:

USE_PREEMPTION	Enabled
CPU_CLOCK_HZ	SystemCoreClock
TICK_RATE_HZ	1000
MAX_PRIORITIES	56
MINIMAL_STACK_SIZE	256 *
MAX_TASK_NAME_LEN	16
USE_16_BIT_TICKS	Disabled
IDLE_SHOULD_YIELD	Enabled
USE_MUTEXES	Enabled
USE_RECURSIVE_MUTEXES	Enabled
USE_COUNTING_SEMAPHORES	Enabled
QUEUE_REGISTRY_SIZE	8

USE_APPLICATION_TASK_TAG	Disabled
ENABLE_BACKWARD_COMPATIBILITY	Enabled
USE_PORT_OPTIMISED_TASK_SELECTION	Disabled
USE_TICKLESS_IDLE	Disabled
USE_TASK_NOTIFICATIONS	Enabled
RECORD_STACK_HIGH_ADDRESS	Disabled

Memory management settings:

Memory Allocation	Dynamic / Static
TOTAL_HEAP_SIZE	15360
Memory Management scheme	heap_4

Hook function related definitions:

USE_IDLE_HOOK	Disabled
USE_TICK_HOOK	Disabled
USE_MALLOC_FAILED_HOOK	Disabled
USE_DAEMON_TASK_STARTUP_HOOK	Disabled
CHECK_FOR_STACK_OVERFLOW	Option2 *

Run time and task stats gathering related definitions:

GENERATE_RUN_TIME_STATS	Disabled
USE_TRACE_FACILITY	Enabled
USE_STATS_FORMATTING_FUNCTIONS	Disabled

Co-routine related definitions:

USE_CO_ROUTINES	Disabled
MAX_CO_ROUTINE_PRIORITIES	2

Software timer definitions:

USE_TIMERS	Enabled
TIMER_TASK_PRIORITY	2
TIMER_QUEUE_LENGTH	10
TIMER_TASK_STACK_DEPTH	512

Interrupt nesting behaviour configuration:

LIBRARY_LOWEST_INTERRUPT_PRIORITY	15
LIBRARY_MAX_SYSCALL_INTERRUPT_PRIORITY	5

Added with 10.2.1 support:

MESSAGE_BUFFER_LENGTH_TYPE	size_t
USE_POSIX_ERRNO	Disabled

CMSIS-RTOS V2 flags:

USE_OS2_THREAD_SUSPEND_RESUME	Enabled
USE_OS2_THREAD_ENUMERATE	Enabled
USE_OS2_EVENTFLAGS_FROM_ISR	Enabled
USE_OS2_THREAD_FLAGS	Enabled
USE_OS2_TIMER	Enabled
USE_OS2_MUTEX	Enabled

2.5.2. Include parameters:

Include definitions:

vTaskPrioritySet	Enabled
uxTaskPriorityGet	Enabled
vTaskDelete	Enabled
vTaskCleanUpResources	Disabled
vTaskSuspend	Enabled
vTaskDelayUntil	Enabled
vTaskDelay	Enabled
xTaskGetSchedulerState	Enabled
xTaskResumeFromISR	Enabled
xQueueGetMutexHolder	Enabled
xSemaphoreGetMutexHolder	Disabled
pcTaskGetTaskName	Disabled
uxTaskGetStackHighWaterMark	Enabled
xTaskGetCurrentTaskHandle	Enabled
eTaskGetState	Enabled
xEventGroupSetBitFromISR	Disabled
xTimerPendFunctionCall	Enabled
xTaskAbortDelay	Disabled
xTaskGetHandle	Disabled
uxTaskGetStackHighWaterMark2	Disabled

2.5.3. Advanced settings:

Newlib settings (see parameter description first):

USE_NEWLIB_REENTRANT **Enabled ***

Project settings (see parameter description first):

Use FW pack heap file Enabled

2.6. LWIP

mode: Enabled

Advanced parameters are not listed except if modified by user.

2.6.1. General Settings:

LwIP Version:

LwIP Version (Version of LwIP supported by CubeMX ** CubeMX specific **)	2.1.2
IPv4 - DHCP Options:	
LWIP_DHCP (DHCP Module)	Enabled
RTOS Dependency:	
WITH_RTOS (Use FREERTOS ** CubeMX specific **)	Enabled
CMSIS_VERSION (CMSIS API Version used)	CMSIS v2
RTOS_USE_NEWLIB_REENTRANT (RTOS used - 1)	Enabled
Platform Settings:	
PHY Driver	Choose/LAN8742/DP83848
Protocols Options:	
LWIP_ICMP (ICMP Module Activation)	Enabled
LWIP_IGMP (IGMP Module)	Disabled
LWIP_DNS (DNS Module)	Enabled *
LWIP_UDP (UDP Module)	Enabled
MEMP_NUM_UDP_PCB (Number of UDP Connections)	4
LWIP_TCP (TCP Module)	Enabled
MEMP_NUM_TCP_PCB (Number of TCP Connections)	5

2.6.2. Key Options:

Infrastructure - OS Awareness Option:	
NO_SYS (OS Awareness)	OS Used
Infrastructure - Timers Options:	
LWIP_TIMERS (Use Support For sys_timeout)	Enabled
Infrastructure - Core Locking and MPU Options:	
SYS_LIGHTWEIGHT_PROT (Memory Functions Protection)	Enabled
Infrastructure - Heap and Memory Pools Options:	
MEM_SIZE (Heap Memory Size)	10 * 1024 *
Infrastructure - Internal Memory Pool Sizes:	
MEMP_NUM_PBUF (Number of Memory Pool struct Pbufs)	16
MEMP_NUM_RAW_PCB (Number of Raw Protocol Control Blocks)	4
MEMP_NUM_TCP_PCB_LISTEN (Number of Listening TCP Connections)	8
MEMP_NUM_TCP_SEG (Number of TCP Segments simultaneously queued)	16
MEMP_NUM_LOCALHOSTLIST (Number of Host Entries in the Local Host List)	1
Pbuf Options:	
PBUF_POOL_SIZE (Number of Buffers in the Pbuf Pool)	16
PBUF_POOL_BUFSIZE (Size of each pbuf in the pbuf pool)	592
IPv4 - ARP Options:	
LWIP_ARP (ARP Functionality)	Enabled
Callback - TCP Options:	

TCP_TTL (Number of Time-To-Live Used by TCP Packets)	255
TCP_WND (TCP Receive Window Maximum Size)	2144
TCP_QUEUE_OOSEQ (Allow Out-Of-Order Incoming Packets)	Enabled
LWIP_TCP_SACK_OUT (Allow Sending Selective Acknowledgements)	Disabled
TCP_MSS (Maximum Segment Size)	536
TCP_SND_BUF (TCP Sender Buffer Space)	1072
TCP_SND_QUEUELEN (Number of Packet Buffers Allowed for TCP Sender)	9

Network Interfaces Options:

LWIP_NETIF_HOSTNAME (NETIF Hostname)	Enabled *
LWIP_NETIF_HOSTNAME_NAME (LWIP_NETIF_HOSTNAME_NAME (LWIP NETIF Hostname))	Nucleo-F439 *
LWIP_NETIF_STATUS_CALLBACK (Callback Function on Interface Status Changes)	Disabled
LWIP_NETIF_EXT_STATUS_CALLBACK (Extended Callback Function for several netif)	Disabled
LWIP_NETIF_LINK_CALLBACK (Callback Function on Interface Link Changes)	Enabled

NETIF - Loopback Interface Options:

LWIP_NETIF_LOOPBACK (NETIF Loopback)	Disabled
--------------------------------------	----------

Infrastructure - Threading Options:

TCPIP_THREAD_NAME (TCPIP Thread Name)	"tcpip_thread"
TCPIP_THREAD_STACKSIZE (TCPIP Thread Stack Size)	1024
TCPIP_THREAD_PRIO (TCPIP Thread Priority Level)	24
TCPIP_MBOX_SIZE (TCPIP Mailbox Size)	6
DEFAULT_THREAD_NAME (Default LwIP Thread Name)	"lwip"
DEFAULT_THREAD_STACKSIZE (Default LwIP Thread Stack Size)	1024
DEFAULT_THREAD_PRIO (Default LwIP Thread Priority Level)	3
DEFAULT_RAW_RECVMBOX_SIZE (Default Mailbox Size on a NETCONN Raw)	0
DEFAULT_TCP_RECVMBOX_SIZE (Default Mailbox Size on a NETCONN TCP)	6
DEFAULT_ACCEPTMBOX_SIZE (Default Mailbox Size for Incoming Connections)	6

Thread Safe APIs - Netconn Options:

LWIP_NETCONN (NETCONN API)	Enabled
----------------------------	---------

Thread Safe APIs - Socket Options:

LWIP_SOCKET (Socket API)	Enabled
LWIP_COMPAT_SOCKETS (BSD-style Socket Functions Names)	1
LWIP_SOCKET_OFFSET (Socket Offset Number)	0
LWIP_SOCKET_SELECT (Select for Socket)	Enabled
LWIP_SOCKET_POLL (Poll for Socket)	Enabled

2.6.3. PPP:

PPP Options:

PPP_SUPPORT (PPP Module)	Disabled
--------------------------	----------

2.6.4. IPv6:

IPv6 Options:

LWIP_IPV6 (IPv6 Protocol) Disabled

2.6.5. HTTPD:

HTTPD Options:

LWIP_HTTPD (LwIP HTTPD Support ** CubeMX specific **) Disabled

2.6.6. SNMP:

SNMP Options:

LWIP_SNMP (LwIP SNMP Agent) Disabled

2.6.7. SNTP/SMTP:

SNTP Options:

LWIP_SNTP (LWIP SNTP Support ** CubeMX specific **) Disabled

SMTP Options:

LWIP_SMTP (LWIP SMTP Support ** CubeMX specific **) Disabled

2.6.8. MDNS/TFTP:

MDNS Options:

LWIP_MDNS (Multicast DNS Support ** CubeMX specific **) Disabled

TFTP Options:

LWIP_TFTP (TFTP Support ** CubeMX specific **) Disabled

2.6.9. Perf/Checks:

Sanity Checks:

LWIP_DISABLE_TCP_SANITY_CHECKS (TCP Sanity Checks) Disabled

LWIP_DISABLE_MEMP_SANITY_CHECKS (MEMP Sanity Checks) Disabled

Performance Options:

LWIP_PERF (Performace Testing for LwIP) Disabled

2.6.10. Statistics:

Debug - Statistics Options:

LWIP_STATS (Statistics Collection)	Disabled
------------------------------------	----------

2.6.11. Checksum:

Infrastructure - Checksum Options:

CHECKSUM_BY_HARDWARE (Hardware Checksum ** CubeMX specific **)	Enabled
LWIP_CHECKSUM_CTRL_PER_NETIF (Generate/Check Checksum per Netif)	Disabled
CHECKSUM_GEN_IP (Generate Software Checksum for Outgoing IP Packets)	Disabled
CHECKSUM_GEN_UDP (Generate Software Checksum for Outgoing UDP Packets)	Disabled
CHECKSUM_GEN_TCP (Generate Software Checksum for Outgoing TCP Packets)	Disabled
CHECKSUM_GEN_ICMP (Generate Software Checksum for Outgoing ICMP Packets)	Disabled
CHECKSUM_GEN_ICMP6 (Generate Software Checksum for Outgoing ICMP6 Packets)	Disabled
CHECKSUM_CHECK_IP (Generate Software Checksum for Incoming IP Packets)	Disabled
CHECKSUM_CHECK_UDP (Generate Software Checksum for Incoming UDP Packets)	Disabled
CHECKSUM_CHECK_TCP (Generate Software Checksum for Incoming TCP Packets)	Disabled
CHECKSUM_CHECK_ICMP (Generate Software Checksum for Incoming ICMP Packets)	Disabled
CHECKSUM_CHECK_ICMP6 (Generate Software Checksum for Incoming ICMP6 Packets)	Disabled

2.6.12. Debug:

LwIP Main Debugging Options:

LWIP_DBG_MIN_LEVEL (Minimum Level)	All
------------------------------------	-----

2.6.13. Platform Settings:

Driver_PHY	LAN8742
------------	---------

*** User modified value**

3. System Configuration

3.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
ETH	PC1	ETH_MDC	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	RMII_MDC [LAN8742A-CZ-TR_MDC]
	PA1	ETH_REF_CLK	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	RMII_REF_CLK [LAN8742A-CZ-TR_REFCLK0]
	PA2	ETH_MDIO	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	RMII_MDIO [LAN8742A-CZ-TR_MDIO]
	PA7	ETH_CRS_DV	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	RMII_CRS_DV [LAN8742A-CZ-TR_CRS_DV]
	PC4	ETH_RXD0	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	RMII_RXD0 [LAN8742A-CZ-TR_RXD0]
	PC5	ETH_RXD1	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	RMII_RXD1 [LAN8742A-CZ-TR_RXD1]
	PB13	ETH_TXD1	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	RMII_TXD1 [LAN8742A-CZ-TR_TXD1]
	PG11	ETH_TX_EN	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	RMII_TX_EN [LAN8742A-CZ-TR_TXEN]
	PG13	ETH_TXD0	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	RMII_TXD0 [LAN8742A-CZ-TR_TXD0]
RCC	PC14/OSC32_IN	RCC_OSC32_IN	n/a	n/a	n/a	
	PC15/OSC32_OUT	RCC_OSC32_OUT	n/a	n/a	n/a	
	PH0/OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PH1/OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
USART2	PD5	USART2_TX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
	PD6	USART2_RX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
GPIO	PG6	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	USB_PowerSwitchOn [STMP2151STR_EN]
	PG7	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	USB_OverCurrent [STMP2151STR_FAULT]

3.2. DMA configuration

nothing configured in DMA service

3.3. NVIC configuration

3.3.1. NVIC

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	15	0
System tick timer	true	15	0
TIM6 global interrupt, DAC1 and DAC2 underrun error interrupts	true	15	0
Ethernet global interrupt	true	5	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
USART2 global interrupt	unused		
Ethernet wake-up interrupt through EXTI line 19	unused		
FPU global interrupt	unused		

3.3.2. NVIC Code generation

Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
Non maskable interrupt	false	true	false
Hard fault interrupt	false	true	false
Memory management fault	false	true	false
Pre-fetch fault, memory access fault	false	true	false
Undefined instruction or illegal state	false	true	false
System service call via SWI instruction	false	false	false
Debug monitor	false	true	false
Pendable request for system service	false	false	false
System tick timer	false	false	true
TIM6 global interrupt, DAC1 and DAC2 underrun error interrupts	false	true	true
Ethernet global interrupt	false	true	true

* User modified value

4. System Views

4.1. Category view

4.1.1. Current

5. Docs & Resources

Type	Link
------	------